


HB8830 Smart Wristband

The Smart Wristband can be programmed on demand using an RFID reader/writer at a frequency of 13.56MHz. Available in a choice of four RFID inlays, available with customer logo.

RFID Smart Wristband Specification

Model No.	HB8830BU	HB8830GEN	HB8830GE	HB8830PI
Operating temperature	-40°C to 70°C	-40°C to 70°C	-40°C to 70°C	-40°C to 70°C
Storage temperature	-40°C to 80°C	-40°C to 80°C	-40°C to 80°C	-40°C to 80°C
Material	PVC	PVC	PVC	PVC
Water proof	Y	Y	Y	Y
Technology				
Philips(I-CODE-SLI)	Y	Y	Y	Y
Philips(Mifare S50)	Y	Y	Y	Y
Texas Instrments(Tag-it HF)	Y	Y	Y	Y
Texas Instruments(Tag-it HF-I)	Y	Y	Y	Y

Smart Wristband Dimension:

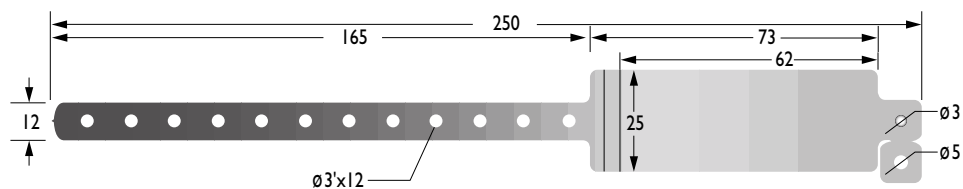

NOTE:

Unit is mm.

Dimension tolerance is +/-1mm.